


REVISONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	28-Aug-19	S.X
2	尾巴直径更改	06-Oct-19	S.X

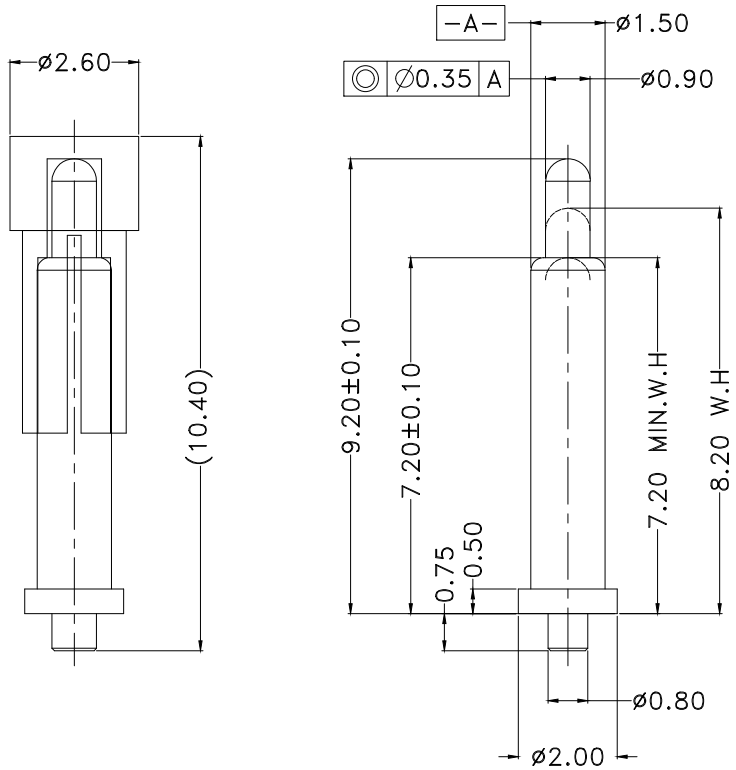


技术要求
 1. 针头和针管同轴度0.35最大, 轴线单边偏摆0.175最大
 2. 机械性能
 2-1 工作高度弹力: 35±5gf
 2-2 寿命: 10,000次
 3. 电气性能
 3-1 额定电压: 12V 最大.
 3-2 额定电流: 1A 最大.
 3-3 接触阻抗: 30 mΩ 最大.
 4. 环境性能
 4-1 盐雾: 48H

4	盖子	CAP-2660	1	-----
3	针头	P061010-2	1	黄铜C3604, 镀金5u"
2	弹簧	S081072	1	不锈钢SUS304
1	针管	B071079a-1	1	黄铜C3604, 镀金3u"
序号	零件名称	零件料号	数量	描述

UNLESS OTHERWISE SPECIFIED, TOLERANCE ARE:
 X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2

NOTICE- These drawing, specifications, or other data are, and remain property of wizconn corporation. (2) are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation, or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any others person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other date.

TITLE: POGO PIN (Ø1.5*9.2)		 深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.	
USE ON: ASSEMBLY	DESIGN: Jason	DWG NO.: DP159282-1-TR	
MATERIAL:	CHECK: Jason	PART NO.: DP159282-1-TR	
FINISH:	APPROVED: Cliff	SCALE: 1:1	REV: 2 SHEET: 1 OF 1
THIRD ANGLE PROJECTION		UNIT: mm	CAD FILE: